

10-26-00

Customer No. 000959

A

Case Docket No. SMQ-036

10/25/00
3956 U.S. PTOTHE ASSISTANT COMMISSIONER FOR PATENTS
Box Patent Application
Washington, D.C. 202313956 U.S. PTO
09/696274
10/25/00

"Express Mail" Mailing Label Number EL 5897409311US

Date of Deposit October 25, 2000

I hereby certify that this transmittal letter and the papers referred to as being enclosed therein are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Signature

William J. McKinney

Please Print Name of Person Signing

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): Robert P. St. Pierre

For: PROTOCOL FOR A REMOTE CONTROL DEVICE TO ENABLE CONTROL OF NETWORK ATTACHED DEVICES

Enclosed are:

- ☐ This is a request for filing a ☐ continuation ☐ divisional application under 37 CFR 1.53(b), of pending prior application serial no. _____ filed on _____ entitled _____.
- ☒ 19 pages of specification, 4 pages of claims, 1 pages of abstract.
- ☒ 20 sheets of drawings.
- ☒ A Declaration, Petition and Power of Attorney.
- ☒ An assignment of the invention to SUN MICROSYSTEMS, INC. _____ . A recordation form cover sheet (Form PTO 1595) is also enclosed.
- ☐ A verified statement to establish small entity status under 37 C.F.R. 1.9 and 37 C.F.R. 1.27.
- ☐ Other _____

The filing fee has been calculated as shown below:

| | (Col. 1) | (Col. 2) |
|--|------------|------------|
| FOR: | NO. FILED | NO. EXTRA |
| BASIC FEE | ////////// | ////////// |
| TOTAL CLAIMS | 20 - 20 | = 0 |
| INDEP. CLAIMS | 3 - 3 | = 0 |
| <input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED | | |

* If the difference in Col. 2 is less than zero,
enter "0" in Col. 2.

| SMALL ENTITY | |
|--------------|-----|
| RATE | FEE |
| ////////// | \$ |
| x 9= | \$ |
| x 40 | \$ |
| +135 | \$ |
| TOTAL | 0 |

| OTHER THAN SMALL ENTITY | |
|-------------------------|----------|
| RATE | FEE |
| ////////// | \$ 710 |
| x 18= | \$ 0 |
| x 80 | \$ 0 |
| +270 | \$ |
| TOTAL | \$710.00 |


- ☐ Please charge my Deposit Account No. 12-0080 in the amount of \$
A duplicate copy of this sheet is enclosed.
- ☒ A check in the amount of \$ \$710.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 12-0080.
A duplicate copy of this sheet is enclosed.
- ☒ Any additional filing fees required under 37 C.F.R. 1.16.
- ☒ Any patent application processing fees under 37 C.F.R. 1.17.

- ☐ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 12-0080.
A duplicate copy of this sheet is enclosed.
- ☐ Any patent application processing fees under 37 C.F.R. 1.17.
- ☐ The issue fee set in 37 C.F.R. 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).
- ☐ Any filing fees under 37 C.F.R. 1.16 for presentation of extra claims.
- ☒ A check in the amount of \$ 40.00 to cover the recording of assignment documents is also enclosed.
- ☒ Address all future communications (May only be completed by applicant, or attorney or agent of record) to Kevin J. Canning, Esq. at **Customer Number: 000959** whose address is:

Lahive & Cockfield, LLP
28 State Street
Boston, Massachusetts 02109

Date: October 25, 2000

LAHIVE & COCKFIELD, LLP
Attorneys at Law

By 
Kevin J. Canning, Esq.
Reg. No. 35,470
28 State Street
Boston, MA 02109
(617) 227-7400
Telecopier (617) 742-4214

United States Application

Entitled: PROTOCOL FOR A REMOTE CONTROL DEVICE TO ENABLE
CONTROL OF NETWORK ATTACHED DEVICES

Inventor: Robert P. St. Pierre

PROTOCOL FOR A REMOTE CONTROL DEVICE
TO ENABLE CONTROL OF NETWORK ATTACHED DEVICES

Technical Field

5

The present invention relates generally to the control of devices attached to a network, and more particularly to a protocol facilitating the control of multiple network attached devices by a remote control device.

10 Background of the Invention

Consumer electronic devices are often controlled by remote controls.

Typically these remote controls or "remotes" are handheld devices having a series of buttons. Some remotes have a limited LED display and, in the case of "all in one" or

15 "multi-remotes", control more than one device. Devices which are traditionally controlled by such remotes include televisions, VCR's, stereo receivers, CD players and other similar devices.

The remotes control the devices by sending the device a command code that is
20 encoded in an infrared (IR) signal. The command code causes the device to execute a particular operation. For instance, the remote may send an "off" command to the TV which causes the TV to turn off. Each device has its own unique set of commands and corresponding command codes. The remote has to be manually programmed for each device it seeks to control. For example, to program a device, a user may be
25 instructed to enter a device code (such as 247) by pressing numbers on the keypad of the remote. For a second device, the user might be instructed instead to enter the device code of 249. The device code serves as an index into a code table which has been pre-programmed into the remote. The code table identifies the proper command codes for the associated device. A user can then use the remote to control the device
30 whose codes the remote has identified.

This current approach has some major drawbacks. First, the approach does not readily accommodate new devices. The remote does not have access to command codes for the new devices because the pre-programmed tables of codes pre-date the
35 new device's date of creation and are structurally fixed. Additionally, this approach requires the manual configuring of the remote by a user who may or may not perform

- the procedure correctly. An additional problem is that, the majority of remotes that are in use today are "line of sight" remotes that require close proximity with no obstacles between the remote and the device. The IR signals must have an unobstructed path from transmitter to receiver in order to be effective. Yet another
- 5 problem is that the types of devices capable of being controlled by a remote are restricted for the most part to consumer electronic devices for which the remotes are programmed in advance.

Summary of the Invention

10

- The present invention addresses the difficulties of controlling new devices which have been added to a network. A network protocol, hereafter the NetCTL protocol, enables a remote control device to dynamically learn the command codes of a newly network attached device if the new device is executing the protocol. The
- 15 intervention of a system administrator is not necessary since the dynamic learning process happens automatically when the new device is attached to the network. Because the protocol allows the remote control device to learn the codes dynamically, there is no need to consult previously written tables of commands which can omit the codes for newly invented devices. A user of the remote control device which has
- 20 "learned" the codes (i.e. acquired the codes) for a network attached device is able to control that device regardless of the device's physical location.

- In accordance with one aspect of the present invention, a method is practiced whereby the protocol enables a remote control device having a network interface to
- 25 dynamically learn the command codes of a device attached to the network. The network attached devices whose commands are capable of being learned by the remote control device can take many forms such as kitchen appliances, stereo equipment, computer equipment, etc. Any network attached device that uses command codes and is equipped with the protocol can be located by the remote
- 30 control device. Once the remote control device has learned the command codes, a user of the remote control device can use the remote control device to control the network attached device by sending the learned command codes to that network attached device. An example of the use of the protocol would have a user with access

to a remote control device in a house's bedroom sending command codes to a stove in the kitchen and a stereo in the living room. The protocol enables the remote control device to control types of devices attached to the network which traditionally have not operated via remote control.

5

In accordance with another aspect of the current invention, the network environment is in a motor vehicle and a method is practiced whereby the protocol enables a remote control device having a network interface to dynamically learn the command codes of a device attached to the automobile network. The network attached devices themselves can take many forms. Any network attached device connected to the automobile network that uses command codes and is equipped with the protocol can be located by the remote control device. Once the remote control device has "learned" the command codes, a user can use the remote control device to control the network attached device by sending command codes to that network attached device.

15

Brief Description of the Drawings

Figure 1 is a block diagram showing an illustrative embodiment of the present invention;

20

Figure 2 is a block diagram showing an alternative embodiment of the present invention which includes a network that is located in a car;

Figure 3 is a block diagram depicting a remote control device used to execute the NetCTL protocol;

25

Figure 4A is a block diagram illustrating the sequence of messages occurring in one aspect of the illustrated embodiment that does not use a Directory Agent of the Service Location Protocol;

30

Figure 4B is a block diagram illustrating the sequence of messages occurring in an alternative aspect of the illustrated embodiment that does use a Directory Agent of the Service Location Protocol;

Figure 5 is a block diagram showing the frame format of the header for client side messages used in the illustrated embodiment;

Figure 6A is a flow chart of the sequence of messages in the illustrative embodiment's Hello request and response;

Figure 6B is a block diagram showing the frame format used in the body of the Hello Request and the Hello Response of Figure 6;

- 5 Figure 7A is a flow chart of the sequence of messages in the illustrative embodiment's List Commands request and response;

Figure 7B is a block diagram showing the frame format used in the body of the List Commands Request and the List Commands Response of Figure 7;

- 10 Figure 8A is a flow chart of the sequence of messages in the illustrative embodiment's Do Command request and response;

Figure 8B is a block diagram showing the frame format used in the body of the Do Request and the Do Response of Figure 8;

Figure 9A is a flow chart of the sequence of messages in the illustrative embodiment's Goodbye Command request and response;

- 15 Figure 9B is a block diagram showing the frame format used in the body of the Goodbye Request and the Goodbye Response of Figure 9;

Figure 10A is a flow chart of the sequence of messages in the illustrative embodiment's Get Image Command request and response;

- 20 Figure 10B is a block diagram showing the frame format used in the body of the Get Image Request and the Get Image Response of Figure 10;

Figure 11A is a flow chart of the sequence of messages in the illustrative embodiment's Get Text Command request and response;

Figure 11B is a block diagram showing the frame format used in the body of the Get Text Request and the Get Text Response of Figure 11;

- 25 Figure 12A is a flow chart of the sequence of messages in the illustrative embodiment's Get Layout Help Command request and response;

Figure 12B is a block diagram showing the frame format used in the body of the Get Layout Help Request and the Get Layout Help Response of Figure 12.

Detailed Description of the Invention

The illustrative embodiment of the present invention employs a
5 protocol (i.e. the NetCTL protocol) that facilitates a remote control device locating
other network attached devices. The protocol also enables the remote control device
to dynamically learn command codes for network attached devices and then use those
command codes to control the network attached devices. The set of device types that
can be controlled by the remote control device is not statically fixed and is limited
10 only by the number of devices on the network executing the protocol and hardware
limitations of the remote control device.

The protocol is designed to be used in a network, such as a computer network
that supports the TCP/IP protocol suite. Because protocol communications are carried
15 over the network, there is no need for the remote control device to be in physical
proximity or "line of sight" with the controlled device. In fact, the remote control
device's network interface can be either a physical interface or a wireless interface.
Moreover, the types of devices that may be controlled by the remote control device
includes devices that are not typically controlled by an Infrared remote control
20 device.

Figure 1 depicts an environment suitable for practicing the illustrative
embodiment of the present invention. The environment includes a network 2 to which
devices 4, 6, 8, 10 are interfaced. The devices include a remote control device 4 that
25 supports the NetCTL protocol. The devices also include network attached devices 6
and 8 that do not support the NetCTL protocol (and network attached device 10 that
supports the NetCTL protocol). The remote control device 4 may control all of the
attached network devices 6, 8 and 10, even the devices 6 and 8 that do not support the
protocol. It is presumed that the remote control device 4 is already aware of the
30 network attached devices 6 and 8 but is not yet aware of network attached device 10
in the depiction of Figure1.

Those skilled in the art will recognize that the components shown in Figure 1 are intended for illustration purposes only and are in no way meant to be limiting.

The present invention may be practiced on networks having different topologies and possessing different network devices. The network may be an Internet Protocol (IP)

- 5 based network capable of sending and routing packets over the Internet. If the network is an IP based network, both the remote control device and any network attached devices executing the NetCTL protocol will also use the Service Location Protocol (SLP) as part of the device identification/registration process.

- 10 The Service Location Protocol (SLP) is a protocol established by the Internet Engineering Task Force (IETF) that simplifies the discovery of network resources. The protocol utilizes the concept of User Agents, Service Agents and Directory Agents. Applications running on a computer are represented by User Agents which understand the service and resource needs of the application. In the case of the
- 15 present invention, the remote control device is represented by a User Agent. Each network device is represented by a Service Agent. Some networks have Directory Agents. The Service Agent sends out a multicast request for any Directory Agents on the network to make contact. If any Directory Agents respond, the Service Agent sends a registration unicast to each responding Directory Agent. The registration
- 20 unicast includes the type of device the Service Agent is representing, the device's attributes, and the device's Uniform Resource Locator (URL) address. An attribute is a characteristic that can be used to distinguish one device from another. For example an attribute for a printer is color capability. Another attribute for the printer is its location. When a User Agent needs a particular service, it sends out a service
- 25 request which includes both the type of service and attributes desired. If the network possesses a Directory Agent, the Directory Agent responds with a list of eligible devices and the devices Uniform Resource Locator (URL) address. If there is no Directory Agent on the network, the User Agent multicasts its service request on the network and the Service Agents for devices whose attributes match those requested
- 30 respond directly to the User Agent.

In one embodiment of the present invention, the network is an Internet Protocol (IP) based network and the Service Location Protocol (SLP) is utilized to

- locate and identify available network attached devices, such as the network attached device 10. The NetCTL protocol utilizes the SLP in one of two ways depending on the configuration of the network 2. Upon being initially attached to the network, the Service Agent for a device executing the NetCTL protocol 10 multicasts a request for any available Directory Agents to contact the Service Agent. The Service Agent then unicasts a "registration" message to each responding Directory Agent. The registration message includes a text string identifying the name of the network attached device 10, the device's attributes, and the URL address giving the device's location on the network 2. The Directory Agent will subsequently forward this information to the remote control device 4 when the User Agent for the remote control device sends out a multicast request for a list of available network devices. If the network 2 does not have a Directory Agent, the User Agent for the remote control device 4 sends a multicast request out on the network directing Service Agents which represent devices which possess certain attributes to contact the User Agent.
- Regardless of which method is used, once the remote control device 4 receives the information for a device it wishes to contact, it can do so directly by sending messages to the device's URL address.

- Figure 2 depicts an alternative embodiment of the present invention where the remote control device 4 is used in an automobile. The environment shown in Figure 2 includes a car network 12 to which a Seat Positioning Control Device 16, a Climate Control Device 18 (heating and air conditioning), a CD player 20 and a Global Positioning Device 22 (used to provide mapping operations for the driver) are attached. A car stereo 24 and a cellular phone 26 are also connected to the network. The remote control device is capable of controlling all of the components 16, 18, 20, 22, 24, and 26 by sending communications on the internal car network 12.

- The illustrative embodiment facilitates multiple network attached devices 10 being identified by the remote control device 4. After identification of the network attached device 10, the remote control device 4 dynamically learns the command codes of the identified network attached device through a sequence of protocol defined request and response messages. Once the remote control device 4 has received the codes for the network attached device 10, a user of the remote control

device is able to select a device from among those devices that have been identified, and issue commands to that network attached device.

Figure 3 depicts in more detail, an example of the remote control device 4.

- 5 The remote control device 4 includes, a touch screen display surface 28. A graphical user interface (GUI) is shown on the touch screen display surface 28. The GUI includes numbers 1-10 (identified by reference number 30 in the figures) that may be depressed by a user to make a selection. The GUI also depicts the names 31 of the network attached devices that can be controlled by the remote control device 4. Each
- 10 network attached device name 31 appearing on the display surface 28 corresponds to a graphical user interface simulating a button 30. For example, "Seat" corresponds with button "1". A user selects a particular device by touching the appropriate button and a request is sent to the selected device. The remote control device 4 includes a TINI board 36 (provided by Dallas Semiconductor, Inc.) with a serial port 32 and a
- 15 network interface 34. The TINI board 36 contains a processor for executing instructions. The remote control device 4 also includes a 1 wire bus 42 and a plurality of switches 40 and ID chips 38 corresponding to the number of simulated buttons. Each "button" has 1 switch 40 and identity chip 38 assigned to it. The depression of a button closes the corresponding switch 40 which activates the identity chip 38. The
- 20 identity chip 38 sends a signal bearing its ID to the TINI 36 which then sends a NetCTL protocol request to the selected device by way of the network interface 34.




- The images depicted on the touch screen display surface 28 will vary according to the stage of communication between the electronic remote control device
- 25 4 and network attached devices. Thus after the user selects one of the network attached devices, a new screen may be shown to provide the user with appropriate choices.

- A practitioner of the art will recognize that the physical composition of the
- 30 remote control device 4 can take many different forms. For example the display surface can be a standard LCD display or a regular computer monitor screen rather than a touch screen and the simulated buttons may be replaced by mouse buttons or keyboard keys rather than through the use of a touch screen. Alternatively, the

- buttons can be physical buttons next to the display surface which a user would manually depress. Additional embodiments of the invention are also possible. However, regardless of the form of the physical makeup of the buttons 30 on the remote control device 4, the protocol functions identically in handling
- 5 communications with the network attached devices.

- When the user of the remote control device 4 selects the device that they are interested in by pressing/clicking on the button 30 associated with the name of a device on the network, the button being either physical or virtual, a request for the
- 10 operational command codes for that device is sent over to the network attached device 10. The NetCTL protocol includes several formats for replies to the command request. The format that is used is dictated by the capabilities of both the remote control device 4 and the network attached device 10. In the case of a first format, the network attached device replies to the request with the command codes for the device
- 15 accompanied by a text string. A second format enables the network attached device 10 to return its command codes accompanied by a graphic image. A format enables the selected device to return its command codes accompanied by a text string and graphic image combination to the remote control device 4.

- 20 By way of example, three allowable formats, which are described in more detail below are summarized in this chart for hypothetical responses from a selected VCR:

| First Format | |
|---------------|---|
| code | Accompanying Text String |
| 000 | "Stop" |
| 001 | "Play" |
| 010 | "Fast Forward" |
| 011 | "Reverse" |
| 100 | "Record" |
| 101 | "Pause" |
| Second Format | |
| code | Accompanying graphic |
| 000 |  |
| 001 |  |
| 010 |  |

| | | | |
|--------------|---|---|------------------|
| 011 | | □ | |
| 100 | | ○ | |
| 101 | | = | |
| Third Format | | | |
| code | | | text and graphic |
| 000 | □ | | "Stop" |
| 001 | ◐ | | "Play" |
| 010 | ◑ | ◑ | "Fast Forward" |
| 011 | ◒ | | "Reverse" |
| 100 | ○ | | "Record" |
| 101 | = | | "Pause" |

In the event the first format is used, the text string is shown on the touch screen display surface 28. In the event the second format is used, the graphical image is shown on the touch screen display surface 28. In the event the third format is used, both the text string and the graphical image are shown on the display surface 28. If a format is requested by the remote control device 4 that the network attached device 10 cannot satisfy (i.e. a request to a network attached device to send an image graphic when the network attached device supports only text messages, or a request for a JPEG type image when the network attached device supports only GIF images), an error message is returned to the remote control device, and the remote control device subsequently requests another format that both devices can utilize. Each command listed on the touch screen display surface 28 is associated with one of the buttons 30 of the remote control device 4. The user clicks on a button 30 associated with an operational command, and the command code is sent back to the network attached device. Upon receiving the command code, the network attached device 10 attempts to execute the command and returns an acknowledgment of success or an error message to the remote control device 4.

Figure 4A depicts the exchange of messages between a remote control device 4 and a network attached device 10, a VCR. These two devices 4 and 10 are attached to a network which does not have a SLP Directory Agent. Since there is no Directory Agent, the multicast registration request sent out by the Service Agent for the VCR goes unanswered. With no Directory Agent, the Service Agent for the VCR 10 will listen to the network for service requests matching the services and attributes of the

VCR. The User Agent for the remote control device 4 sends out a multicast request for Directory Agents. Upon getting no response, the User Agent will multicast a service request for the type of service the remote requires 45. The Service Agent for each device matching the requested service will unicast a response 46 back to the remote control device 4. Subsequently, the user of the remote control device 4 sees a list displayed on the display surface 28 of all of the available identified devices. In one embodiment of the present invention, the list includes the text string name that accompanied the URL of the network attached device in the registration multicast 45. The user of the remote control device 4 selects the VCR 10 by depressing the button (physical or virtual) 30 that corresponds to the VCR 10. The remote control device 4 sends a request 47 to the VCR 10 for the command codes of the VCR. Upon receipt of the command request, the VCR 10 sends a copy of its command codes 49 to the remote control device 4 via the network 2. The remote control device 4 displays the available commands on its display surface 28, and the user selects a command by depressing the associated button 30. The selection results in a command code 51 being sent to the VCR 10. The VCR 10 attempts to perform the command and sends either an acknowledgement or an error message 53 to the remote control device 4. Upon receipt of the acknowledgement or error message 53 , the remote control device 4 waits for further selections by the user.

Figure 4B depicts the sequence of messages exchanged between a network attached device 10, a VCR, and a remote control device 4 that are utilizing the present invention on an IP based network which includes an SLP Directory Agent 58 to process SLP device registrations. The VCR 10, sends out a registration multicast request 48, utilizing the SLP protocol, to advertise its presence on the network. The registration multicast 45 is received by the Directory Agent 58 for the network 2 (Figure 1). The Directory Agent 58 stores all of the registrations of the different network attached devices 10 as they occur. The User Agent for the remote control device 4 multicasts a request to identify available Directory Agents. The individual Directory Agents respond with identifying information. Subsequently, a user of the remote control device 4 selects an attribute descriptive of the type of devices the user wishes to control. Such an attribute may be for example, "video". The User Agent SLP service request 61 is forwarded to a Directory Agent 58 for

- processing. The SLP Directory Agent 58 responds to the request 61 by sending a list of all the devices matching the attribute class 63 back to the remote control device 4. The list matching the video attribute might be for instance “TV” and “VCR”. The text string names are accompanied by the URLs of network attached devices. The user of the remote control device 4 selects a device to control from the list of those displayed 31, in this case the VCR 10. A request for command codes 47 is sent to the VCR 10. Upon receipt of the command code request 47, the VCR 10 sends a copy of its command codes 49 to the remote control device 4 via the network 2. The remote control device 4 displays the available commands on its display surface 28 and the user selects one by depressing a button 30. The selection sends the selected command code 51 to the VCR 10. The VCR 10 attempts to perform the command and then sends either an acknowledgement of successful operation performance or an error message 53 to the remote control device 4. Upon receipt of the acknowledgement or error message 53, the remote control device 4 waits for further selections by the user. Those skilled in the art will recognize that there can be countless sequences of different message exchanges within the scope of the present invention and the above examples are offered only for the purpose of illustration and are not meant to be a restrictive list of the possible exchanges.
- The present invention dictates the form of the conversation between the remote control device 4 and the network attached devices 10 executing the protocol. The protocol works on a request-response model, where the remote control device 4 executes the client side of the protocol and initiates the requests, and the network attached device 10 executes the server side of the protocol and initiates the responses. The format of the most common exchanges is outlined and described in detail below:

| Client Side of NetCTL Protocol | Server Side of NetCTL Protocol |
|--------------------------------|--------------------------------|
| Remote control device | Network Attached Device |

- Hello(Remote ID) →
← ACK, Session Key(Key), Top Menu Code

List Commands(Key, Menu Code) →

← ACK, List of Command Codes w/Text

Do Command(Key, Cmd Code) →

← ACK, Status String, Prompt, New Menu Code

5

Goodbye(Key) →

← ACK

Utility Functions

Get Image(Key, Cmd Code, Pref Type) →

10

← ACK, type, Image Bits, GridBag Info

Get Text(Key, Cmd Code) →

← ACK, Text

15

Get Layout Help(Key, Menu Code) →

← ACK, Grid Layout Info

The illustrative embodiment of the present invention uses a frame format for messages between the remote control device 4 and the network attached device 10.

20

Figure 5 depicts the format of the message header 74 used in the illustrative embodiment for all of the remote control device's requests. The header 74 is 4 bytes in length and includes a 1 byte version code field 76 set to the version number of the protocol, a 1 byte Operation Code (opcode) field 78 set to the number representing the operation currently being performed, and a 2 byte Session ID field 80 set to the

25

identifier number established for messages between the remote control device and the network attached device during the initial contact between the two devices. The Session ID field 80 is set to 0 if the request is the initial "Hello" request of the present invention. Those skilled in the art will recognize that the size of the fields in the frame format may be adjusted in different versions of the protocol without departing from the scope of the present invention.

30

Once a user of the remote control device 4 indicates a desire to control a registered network attached device 10 by depressing the appropriate button 30, the remote control device attempts to make contact with the selected network attached device as depicted in Figure 6A. Contact is initiated in the illustrative embodiment by the electronic remote control 4 device sending a "Hello" request (step 84) to the

35

selected network attached device 10. The “Hello” request (step 84) contains an ID for the remote control device 4 so that the selected network attached device 10 can respond directly to the remote control device. The network attached device 10 sends a response (step 88) if available, which includes an acknowledgement, a Session Key and the top level menu code to the remote control device 4. The session key is included in any future messages between the two devices. The Top Level Menu Code is included to allow the remote control device 4 to access the menu of command codes of the network attached device 10.

10 The frame format used by the remote control device 4 and the network attached device 10 in the “Hello” request and response is depicted in Figure 6B. The header 90 used in the “Hello” request includes the protocol version number 92, the “Hello” operation code as defined in the protocol 94, and the number “0” in the Session ID field 96 since a message session with the network attached device 10 has not been established. The body of the message 98 includes the electronic remote control ID in the a two byte field 100. The “Hello” response format includes its own header 102 which includes an Acknowledgement field 104, the “Hello” response opcode 106, and a session ID 108 established by the network attached device which serves as a reference number for further messages between the remote control device 4 and the network attached device 10. The body of the response message 110 includes an acknowledgement field 112, the Hello Response Opcode field 114 and a Top Level Menu Code field 116. The Top Level Menu Code 116 identifies the menu holding the list of commands for the selected network attached device 10.

25

Figure 7A depicts the steps by which the remote control device 4 requests and receives the network attached device’s commands and command codes. The remote control device 4 sends a List Commands request (step 120) to the network attached device 10. The List Commands request (step 120) includes the Top Level Menu Code the remote control device 4 had previously received from the network attached device 10. The network attached device 10 sends a response (step 124), which includes an acknowledgement , a list of command codes and a list of text strings representing the names of the available commands, to the remote control device 4.

The frame format used by the illustrative embodiment in the List Commands request and response is depicted in Figure 7B. The List Commands request header 126 includes fields for the protocol version number 128, the List Commands opcode 130, and the session ID 132 assigned by the network attached device 10 in its response to the "Hello" request. The message body 134 includes the Top Level Menu code 136 of the network attached device 10. The List Commands response header 138 includes separate fields for the protocol version 140, the List Commands Response opcode 142, and the Session ID 144. The body of the List Commands response message 146 includes separate fields for the Acknowledgement 148, the Command Count 150 indicating the number of commands being sent, and three fields for each command, the actual command 152, the length of text string field 154 indicating the length of the following field, and the text string field 156 holding the actual name of the command. The three fields are repeated from 1 to n times, with n being the number of commands sent and equal to the number in the Command Count field 150. The text strings representing the names of device commands are displayed on the remote control device 4 display surface 28.

Figure 8A depicts the steps by which the remote control device 4 of the illustrative embodiment requests the network attached device 10 perform a certain operation. The remote control device 4 sends a Do request (step 160) to the network attached device 10. The Do request (step 160) includes the Session ID and one of the network attached device's command codes which the remote control device 4 previously received in the network attached device's List Command response 124. The network attached device's response (step 164) includes an acknowledgement field and may include fields for the status of the network attached device 10 if the network attached device is configured to update its status upon request, and for a prompt message to the user if the operation requires it. The network attached device's response (step 164) also includes a new menu code for the network attached device 10, which identifies the next menu to present to the user.

The frame format used by the illustrative embodiment in the Do Command request and response is depicted in Figure 8B. The Do Command request header 166

includes fields for the protocol version number 168, the Do Commands Opcode 170, and the Session ID 172. The message body of the Do command 174 includes a command code for the network attached device 10. The Do response header 178 includes the protocol version header 180, the Do command response code 182 and the
5 Session ID 184. The message body 186 includes an acknowledgement field 188, and a status length field 190 which indicates the length of the following status field 192. The status field contains bits describing the condition of the network attached device 10. The message body 186 also includes a prompt length field 194 which indicates the length of the following Prompt field 196. Some operations require further input
10 from the user of the remote control device 4, and the prompt field is used to send a text message back to the user from the network attached device 10. The Do response message format also includes a new menu code 198 which provides a different menu for the network attached device 10. Those skilled in the art will recognize that both the status length field 190 and the prompt length field 194 may in some circumstances
15 be set to 0 and the corresponding Status 192 and Prompt 196 fields may be empty. The Status field will be empty if the network attached device 10 does not provide updated device information to the remote control device 4. The Prompt field 196 will be empty if the network attached device 10 is able to complete the operation requested in the Do request 160 without further information from the user of the remote
20 electronic control device 4.

Figure 9A depicts the steps by which the remote control device 4 of the illustrative embodiment requests the network attached device 10 terminate the message session. The remote control device 4 sends a Goodbye request (step 202) to
25 the network attached device 10. The Goodbye request (step 202) includes the Session ID. The network attached device's response (step 206) includes an acknowledgement.

The frame format used by the illustrative embodiment in the Goodbye
30 Command request and response is depicted in Figure 9B. The Goodbye Command request header 210 includes fields for the protocol version number 212, the Goodbye Commands Opcode 214, and the Session ID 216. The message body of the Goodbye command 218 is empty. The Goodbye response header 220 includes the protocol

version field 222, the Goodbye Command response code field 224 and the Session ID field 226. The message body 228 includes an acknowledgement field 230.

- 5 The illustrative embodiment also includes utility functions that allow the remote control device 4 to obtain additional information about a device's preferred control pad layout and additional button image information. If the user of the remote control device 4 wishes to have images to display instead of text, the remote control device can query the network attached device 10 for them directly by sending the Get Image opcode. Figure 10A depicts the steps by which the remote control device 4
- 10 requests the network attached device 10 send image data. The remote control device 4 sends a Get Image request (step 232) to the network attached device 10. The Get Image request (step 232) includes the Session ID, the Command Code for providing the data , and a Preference Type listing the particular type of image requested (i.e.: JPEG, GIF , BMP, etc.). The network attached device's response (step 234)
- 15 includes an acknowledgement or error message, an indication of the type of image being sent, the image bits themselves, and miscellaneous information associated with the image).

- The frame format used by the illustrative embodiment in the Get Image
- 20 Command request and response is depicted in Figure 10B. The Get Image Command request header 236 includes fields for the protocol version number 238, the Get Image Commands Opcode 240, and the Session ID 242. The message body of the Get Image command 244 includes fields for a command code 246, and a preference type 248. The Get Image response header 250 includes fields for the protocol version
- 25 header 252, the Get Image Command response code 254 and the Session ID 256. The message body 258 includes fields for an acknowledgement 260, type (JPEG, GIF, BMP, etc.) 262, image size 264, listing the image size in bytes, image bits 266, the image bits themselves, and a miscellaneous image information field 268.

- 30 Figure 11A depicts the steps by which the remote control device 4 requests the network attached device 10 send text data. The remote control device 4 sends a Get Text request (step 270) to the network attached device 10. The Get Text request

(step 270) includes the Session ID and the appropriate Command Code. The network attached device's response (step 272) includes an acknowledgement and the requested text.

5 The frame format used by the illustrative embodiment in the Get Text Command request and response is depicted in Figure 11B. The Get Text Command request header 274 includes fields for the protocol version number 276, the Get Text Commands Opcode 278, and the Session ID 280. The message body of the Get Text command 282 includes a field for the appropriate command code 284. The Get Text response header 286 includes fields for the protocol version header 288, the Get Text Command response code 290 and the Session ID 292. The message body 294 includes fields for an acknowledgement 296, text length 298, which indicates the length of the upcoming text field 300, which holds the actual text bits.

15 Figure 12A depicts the steps by which the remote control device 4 requests the network attached device 10 send grid layout information for the display surface 28. The remote control device 4 sends a Get Layout Help request (step 302) to the network attached device 10. The Get Layout Help request (step 304) includes the Session ID and the appropriate Menu Code. The network attached device's response 20 (step 304) includes an acknowledgement and the grid layout information.

 The frame format used by the illustrative embodiment in the Get Layout Help Command request and response is depicted in Figure 12B. The Get Layout Help Command request header 306 includes fields for the protocol version number 308, the Get Layout Help Command Opcode 310, and the Session ID 312. The message body of the Get Layout Help command 314 includes a field for the menu code 316 for the commands for which the layout help is sought. The Get Layout Help response header 318 includes fields for the protocol version header 320, the Get Layout Help Command response code 322 and the Session ID 324. The message body 326 includes fields for an acknowledgement 328, grid layout information size 330, which indicates the length of the upcoming grid layout information field 332, which holds the actual grid layout information. The remote control device 4 uses this information to arrange the information shown on its display surface 28.

It will thus be seen that the invention efficiently attains the objects made apparent from the preceding description. Since certain changes may be made without departing from the scope of the present invention, it is intended that all matter
5 contained in the above description or shown in the accompanying drawings be interpreted as illustrative and not in a literal sense. Practitioners of the art will realize that the separate requests and responses illustrated herein may have fields added or deleted from the request or response and additional requests and responses may be added from one protocol version to the next without departing from the scope of the
10 present invention.

We Claim:

1. In a remote control device having a network interface with a network,
5 said network having additional devices interfaced with the network,
a method, comprising the steps of:
 providing a protocol to enable said remote control device to dynamically
locate, and identify a network attached device, and
 with the protocol, retrieving dynamically the command codes of said network
10 attached device, and
 with the protocol, controlling the operations of said network attached device
by means of said dynamically retrieved command codes.
2. The method of claim 1 wherein said method further comprises the steps of:
15 with the protocol, sending communications over an Internet Protocol (IP)
based network.
3. The method of claim 1 wherein said method further comprises the steps of:
with the protocol, dynamically locating and identifying multiple network
20 attached devices with the remote control device
4. The method of claim 1 wherein said method further comprises the steps of:
with the protocol, controlling the operations of multiple network attached
devices with the remote control device
25
5. The method of claim 1 wherein said method further comprises the steps of:
with the protocol, said remote control requesting and receiving a list of
command codes from a network attached device.
- 30 6. The method of claim 5 wherein said method further comprises the steps of:
with the protocol, sending received command codes to said network attached
device from the remote control device.

7. The method of claim 1 wherein said method further comprises the steps of:
with the protocol, displaying on the display surface of said remote control a
list of the network attached devices available to a user.

5

8. The method of claim 1 wherein said method further comprises the steps of:
with the protocol, selecting a device to control from among those listed on the
display surface of the remote control device by a user of the remote control device.

10 9. The method of claim 1 wherein said method further comprises the steps of:
with the protocol, said network attached device receiving a request for its
command codes from said remote control device, and
with the protocol, said network attached device providing said command
codes to the remote control device.

15

10. The method of claim 1 wherein said method further comprises the steps of:
with the protocol, said network attached device providing its command codes
and an associated text string for each code to the remote control device in response to
a request from the remote control device.

20

11. The method of claim 1 wherein said method further comprises the steps of:
with the protocol, said network attached device providing its command codes
and an associated graphical image for each command code to the remote control
device in response to a request from the remote control device.

25

12. The method of claim 1 wherein said method further comprises the steps of:
with the protocol, said network attached device providing its command codes
and an associated graphical image and text string for each command code, to the
remote control device, in response to a request from the remote control device.

30

13. The method of claim 1 wherein said method further comprises the steps of:
with the protocol, said network attached device receiving and executing one of
its command codes from said remote control device.

14. In a remote control device having a network interface with a network, said network having additional devices interfaced with the network, said network being located within a motor vehicle, a method, comprising the steps of:

- 5 providing a protocol to enable a network attached device to be dynamically located, and identified by the electronic remote control device, and with the protocol, said remote control device controlling the operations of said network attached device by means of command codes dynamically retrieved from the network attached device.

10

15. The method of claim 14 wherein said method further comprises the steps of: with the protocol, sending communications over an Internet Protocol (IP) based network.

15

16. The method of claim 14 wherein said remote control device contains a touch pad screen.

17. A medium for use with a remote control device with a network interface with a network, said medium holding computer-executable instructions for performing a

20

method comprising:
 providing additional network attached devices, and
 providing a protocol to enable a network attached device to be dynamically located, and identified by the electronic remote control device, and with the protocol, said remote control device controlling the operations of said network attached device by means of command codes dynamically retrieved from the network attached device.

25

18. The medium of claim 17 wherein said method further comprises the steps of: with the protocol, sending communications over an Internet Protocol (IP) based network.

30

19. The medium of claim 17 wherein said network is located in a motor vehicle.

20. The medium of claim 17 wherein
said remote control device includes a touch pad display screen.

ABSTRACT

- 5 The present invention addresses the difficulties of controlling new devices
which have been added to a network. A network protocol, the NetCTL protocol,
enables a remote control device to dynamically learn the command codes of a newly
network attached device if the new device is executing the protocol. The intervention
of a system administrator is not necessary since the dynamic learning process happens
automatically when the new device is attached to the network. Because the protocol
10 allows the remote control device to learn the codes dynamically, there is no need to
consult previously written tables of commands which can omit the codes for newly
invented devices. A user of the remote control device which has “learned” the codes
(i.e. acquired the codes) for a network attached device is able to control that device,
regardless of the device’s physical location, by selecting and sending the network
15 attached device a command code to perform an operation.

FIGURE 1

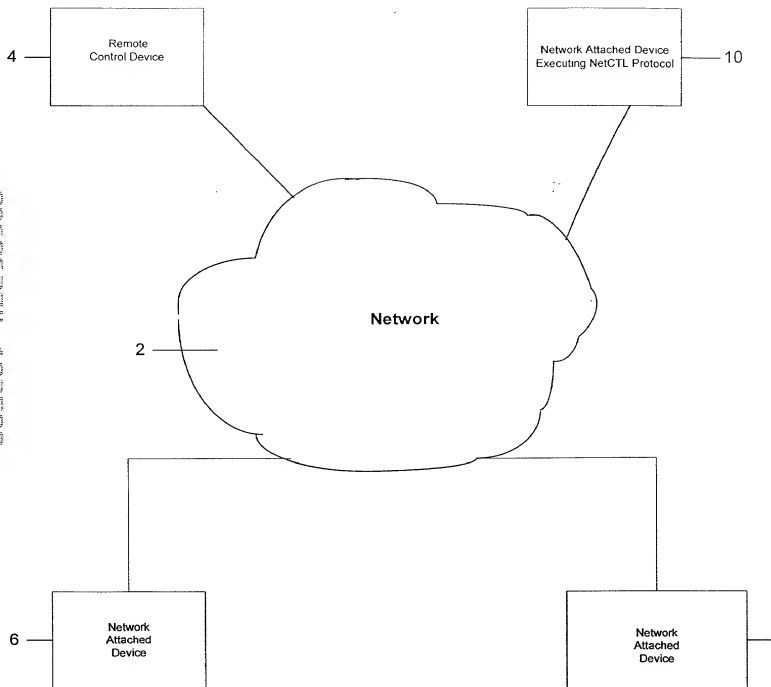


FIGURE 2

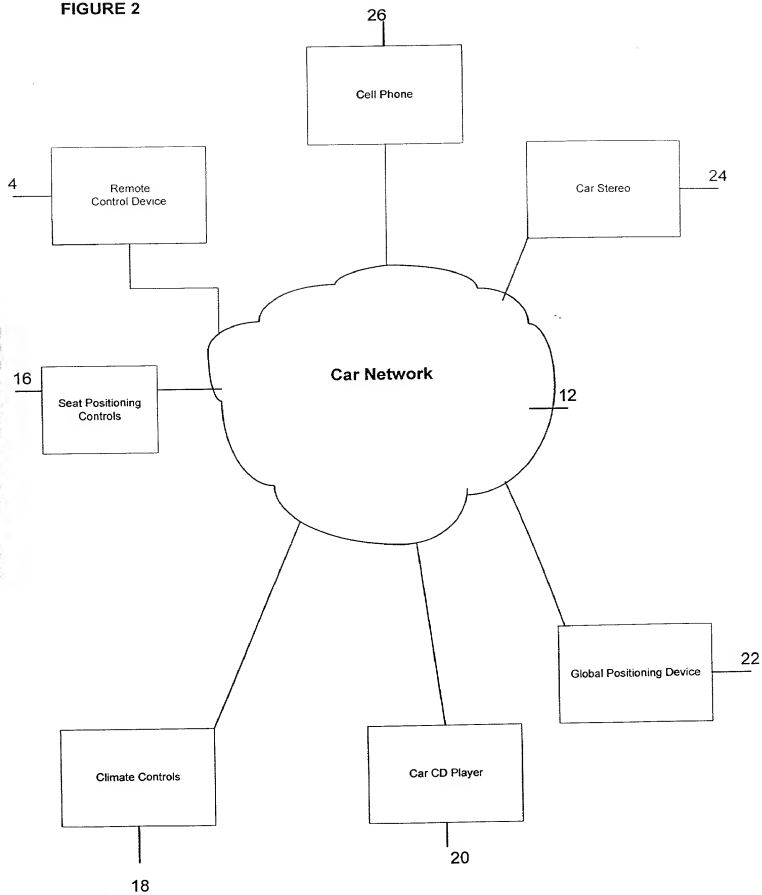


Figure 3

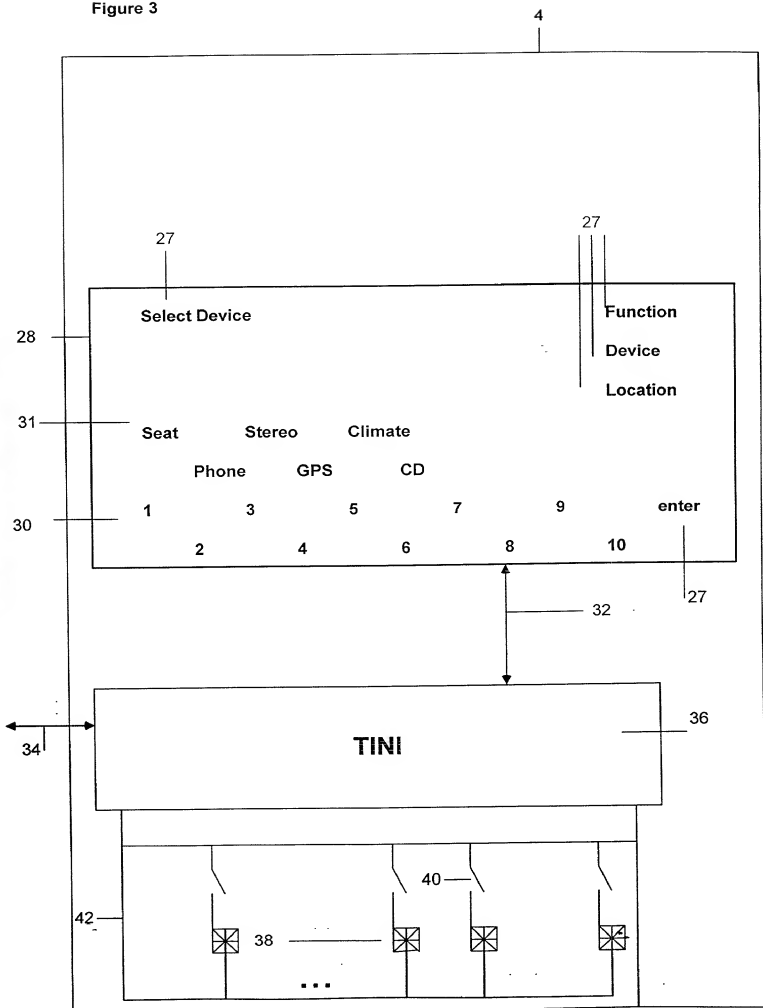


Figure 4A

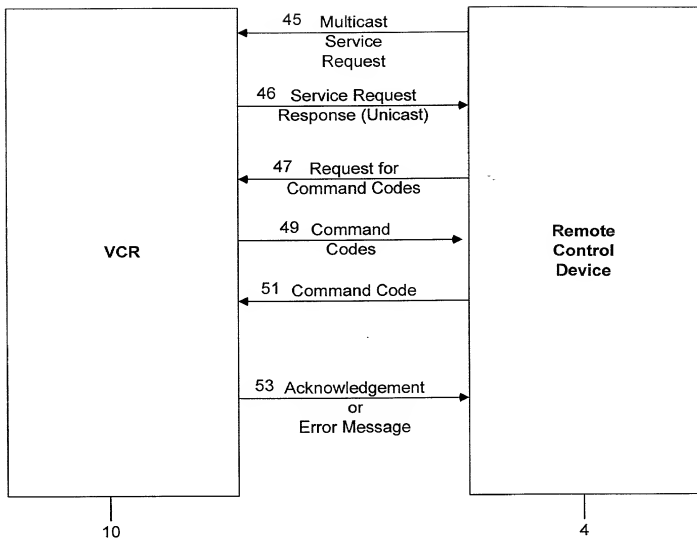


Figure 4B

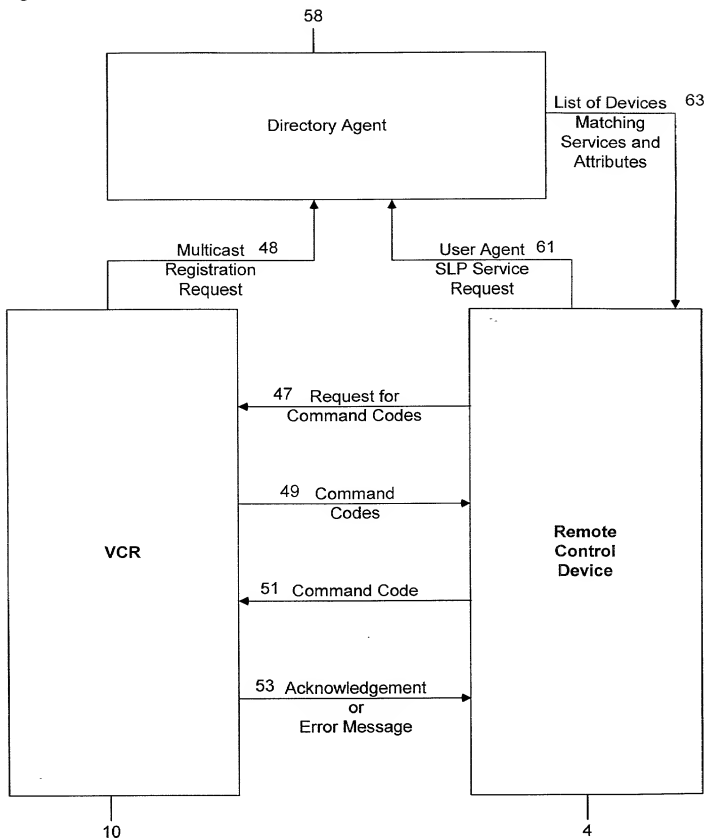


FIGURE 5

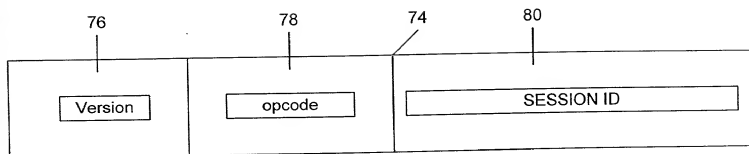


Figure 6A

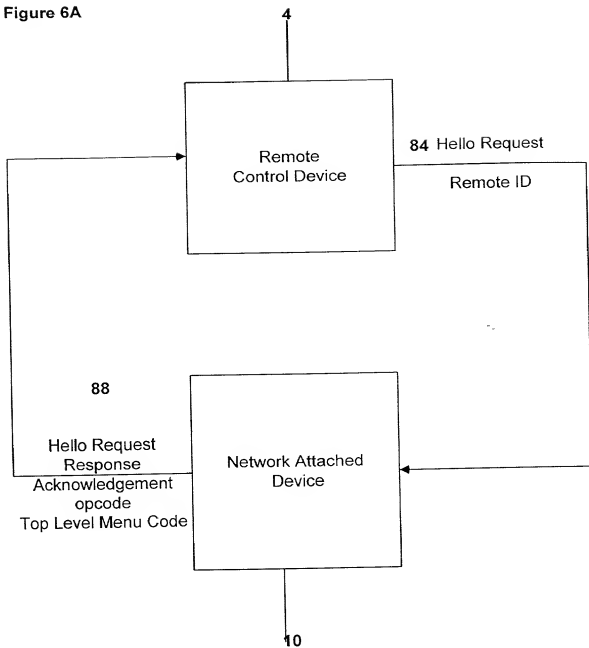


FIGURE 6B

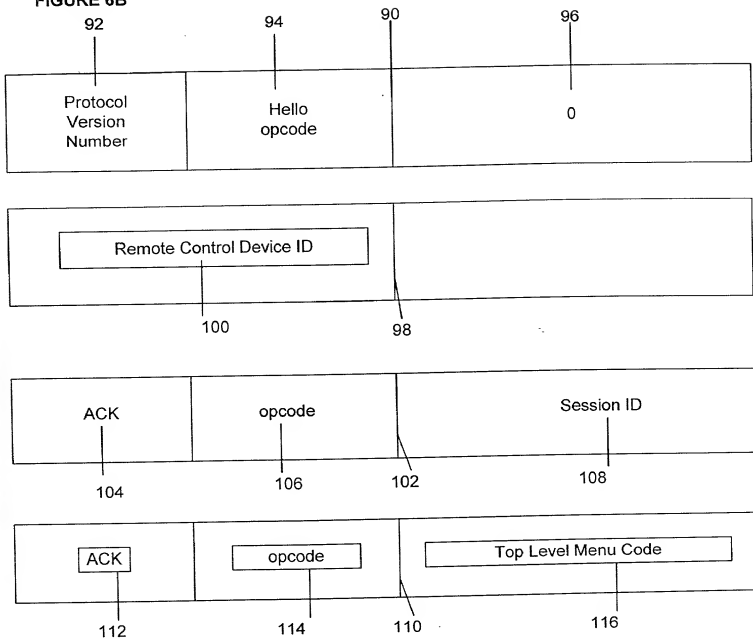


Figure 7A

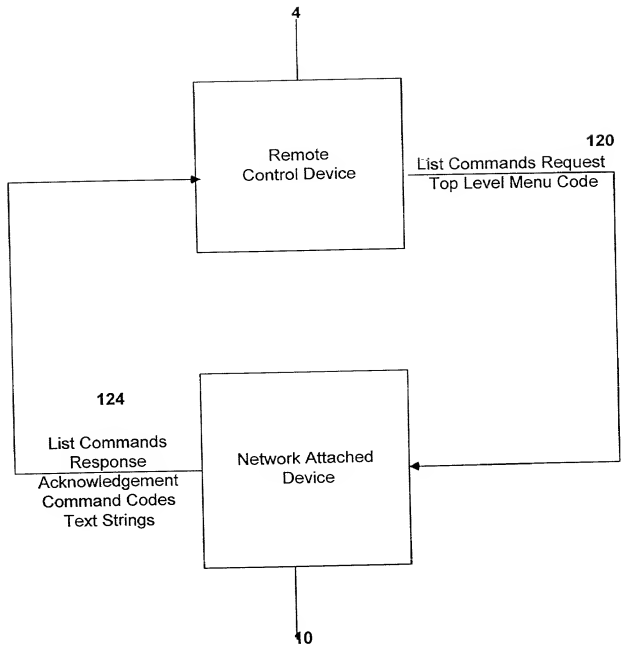


Figure 7B

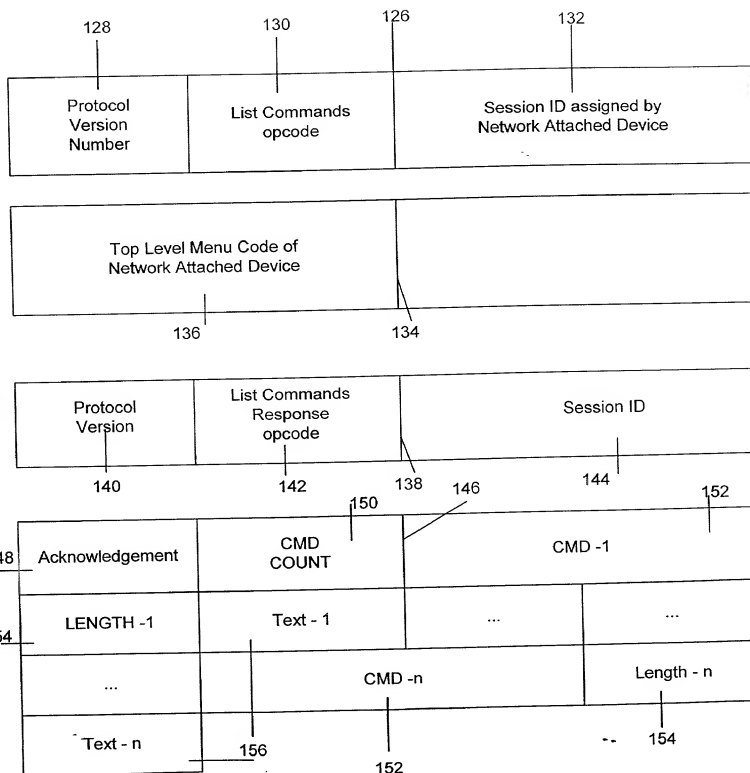


Figure 8A

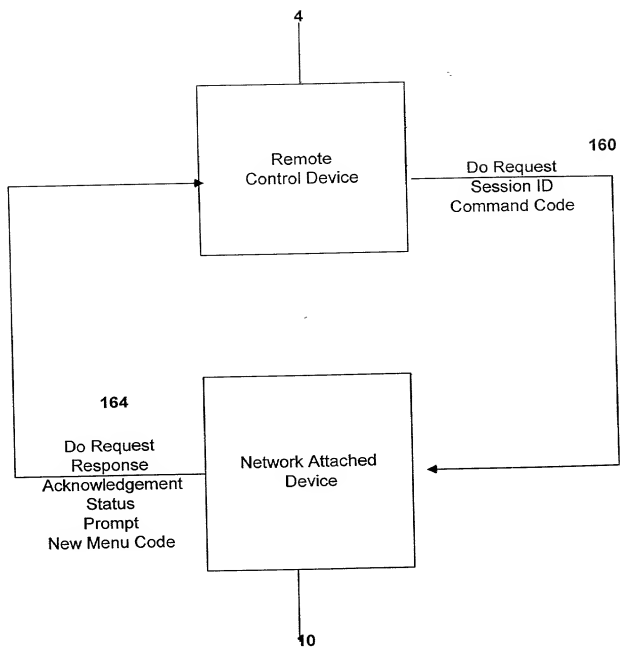


Figure 8B

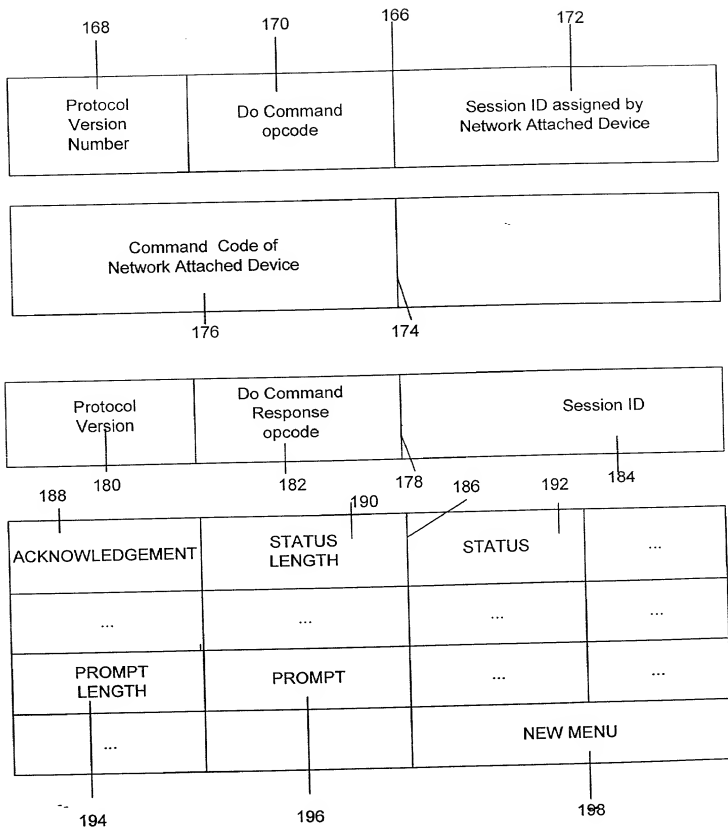


Figure 9A

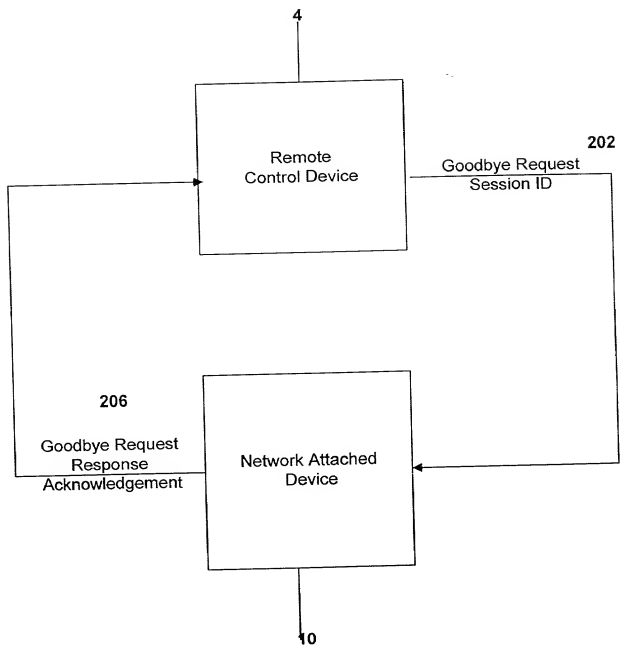


Figure 9B




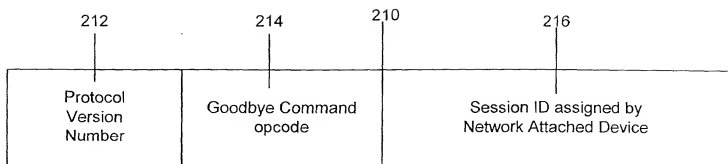


Figure 10A

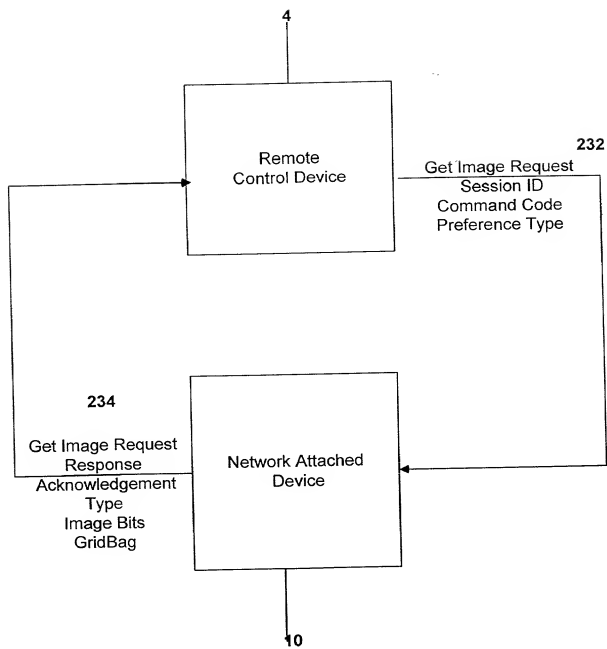


Figure 10B

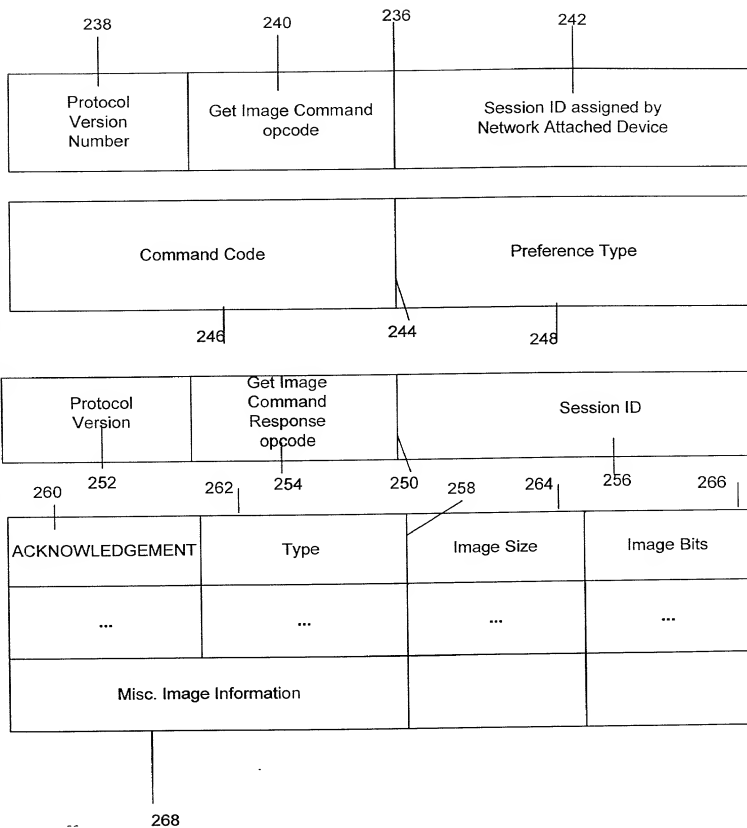


Figure 11A

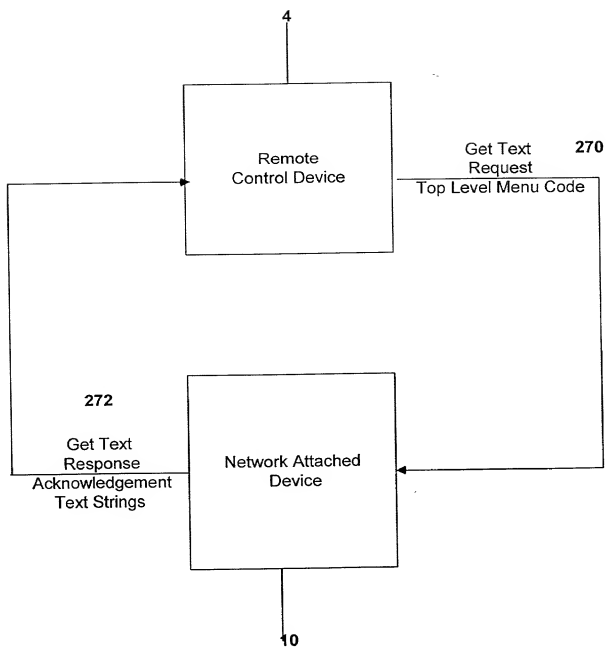


Figure 11B

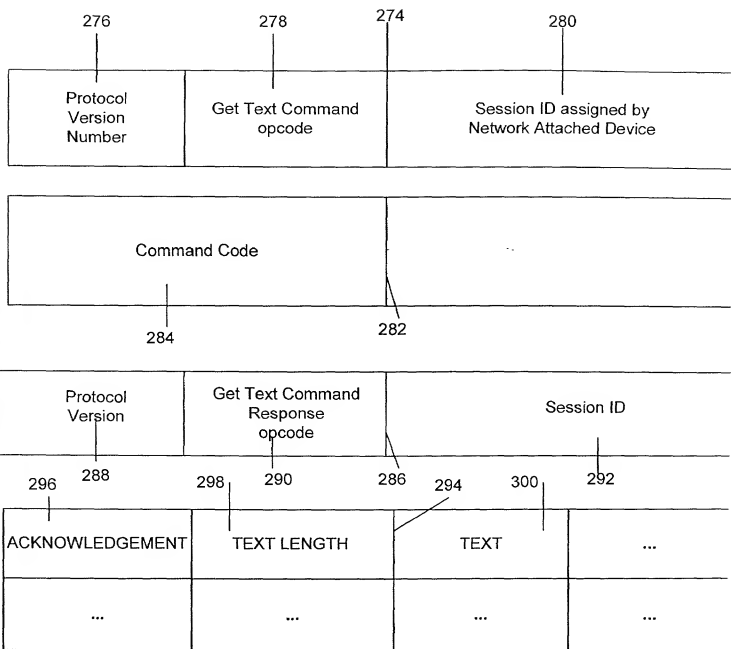


Figure 12A


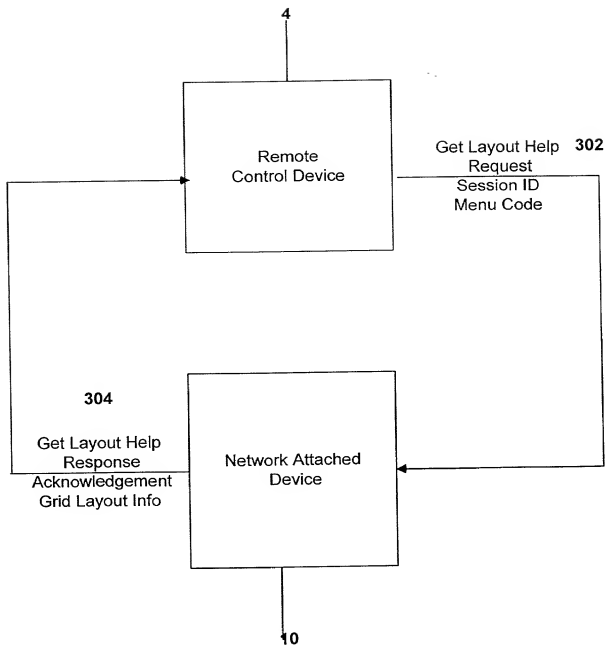


Figure 12B

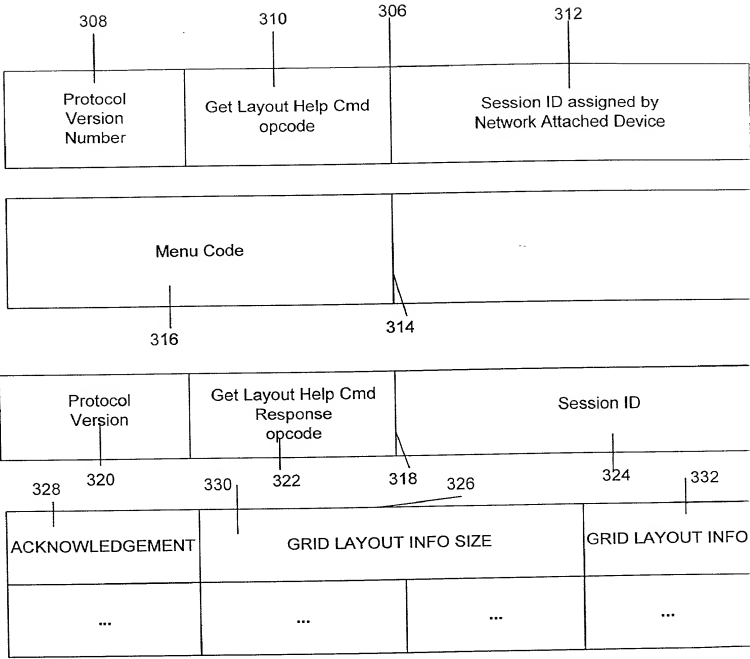

Customer Number: 000959

Attorney's

Docket

Number SMQ-036

(P5025/RSH)

Declaration, Petition and Power of Attorney for Patent Application

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**PROTOCOL FOR A REMOTE CONTROL DEVICE TO ENABLE
CONTROL OF NETWORK ATTACHED DEVICES**

the specification of which

(check one)

X is attached hereto.

_____ was filed on _____ as

Application Serial No. _____

and was amended on _____
(if applicable)

I do not know and do not believe that the subject matter of this application was known or used by others in the United States or patented or described in a printed publication in any country before my invention thereof, or patented or described in a printed publication in any country or in public use or on sale in the United States more than one year prior to the date of this application, or first patented or caused to be patented or made the subject of an inventor's certificate by me or my legal representatives or assigns in a country foreign to the United States prior to the date of this application on an application filed more than twelve months (six months if this application is for a design) before the filing of this application; and I acknowledge my duty to disclose information of which I am aware which is material to the examination of this application, that no application for patent or inventor's certificate on the subject matter of this application has been filed by me or my representatives or assigns in any country foreign to the United States, except those identified below, and that I have reviewed and understand the contents of the specification, including the claims as amended by any amendment referred to herein.

I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

CLAIM OF BENEFIT OF EARLIER FOREIGN APPLICATION(S)

I hereby claim priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below, and have also identified below any foreign application(s) for patent or inventor's certificate filed by me on the same subject matter having a filing date before that of the application(s) from which priority is claimed.

Check one:

☒ no such applications have been filed.

☐ such applications have been filed as follows

EARLIEST FOREIGN APPLICATION(S), IF ANY, FILED WITHIN 12 MONTHS
(6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION

| Country | Application Number | Date of Filing (month,day,year) | Priority Claimed Under 35 USC 119 |
|---------|--------------------|------------------------------------|--|
| | | | <input type="checkbox"/> Yes <input type="checkbox"/> No |
| | | | <input type="checkbox"/> Yes <input type="checkbox"/> No |
| | | | <input type="checkbox"/> Yes <input type="checkbox"/> No |
| | | | <input type="checkbox"/> Yes <input type="checkbox"/> No |
| | | | <input type="checkbox"/> Yes <input type="checkbox"/> No |

ALL FOREIGN APPLICATION(S), IF ANY FILED MORE THAN 12 MONTHS
(6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION

| |
|--|
| |
| |
| |

CLAIM FOR BENEFIT OF U.S. PROVISIONAL APPLICATION(S)

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below.

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

CLAIM FOR BENEFIT OF EARLIER U.S./PCT APPLICATION(S)

I hereby claim the benefit under Title 35, United States Code, §120 of any earlier United States application(s) or PCT international application(s) designating the United States listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the earlier application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date(s) of the earlier application(s) and the national or PCT international filing date of this application. As to subject matter of this application which is common to my earlier application(s), if any, described below, I do not know and do not believe that the same was known or used by others in the United States or patented or described in a printed publication in any country before my invention thereof, or patented or described in a printed publication in any country or in public use or on sale in the United States more than one year prior to the date(s) of said earlier application(s), or first patented or caused to be patented or made the subject of an inventor's certificate by me or my legal representatives or assigns in a country foreign to the United States prior to the date(s) of said earlier application(s) on an application filed more than twelve months (six months if this application is for a design) before the filing of said earlier application(s); and I acknowledge that no application for patent or inventor's certificate on said subject matter has been filed by me or my representatives or assigns in any country foreign to the United States except those identified herein.

(Application Serial No.)

(Filing Date)

(Status)
(patented,pending,aband.)

(Application Serial No.)

(Filing Date)

(Status)
(patented,pending,aband.)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

| | | | |
|------------------------|-----------------|-----------------------------|--|
| James E. Cockfield | Reg. No. 19,162 | Nicholas P. Triano III | Reg. No. 36,397 |
| Thomas V. Smurzynski | Reg. No. 24,798 | Peter C. Lauro | Reg. No. 32,360 |
| Ralph A. Loren | Reg. No. 29,325 | DeAnn F. Smith | Reg. No. 36,683 |
| Giulio A. DeConti, Jr. | Reg. No. 31,503 | William D. DeVaul | Reg. No. 42,483 |
| Ann Lamport Hammitte | Reg. No. 34,858 | David J. Rikkers | Reg. No. 43,882 |
| Elizabeth A. Hanley | Reg. No. 33,505 | Chi Suk Kim | Reg. No. 42,728 |
| Amy E. Mandragouras | Reg. No. 36,207 | Maria Laccotripe Zacharakis | Limited Recognition Under 37 C.F.R. § 10.9(b) |
| Anthony A. Laurentano | Reg. No. 38,220 | | |
| Jane E. Remillard | Reg. No. 38,872 | Debra J. Milasincic | Reg. No. P46,931 |
| Jeremiah Lynch | Reg. No. 17,425 | David R. Burns | Reg. No. P46,590 |
| Kevin J. Canning | Reg. No. 35,470 | Sean D. Detweiler | Reg. No. 42,482 |
| Jeanne M. DiGiorgio | Reg. No. 41,710 | Peter S. Stecher | Reg. No. P47,259 |
| Megan E. Williams | Reg. No. 43,270 | Timothy J. Crean | Reg. No. 37,116 |
| Keneth Olsen | Reg. No. 26,493 | Joseph T. FitzGerald | Reg. No. 33,881 |
| Robert S. Hauser | Reg. No. 37,847 | Christine S. Lam | Reg. No. 37,489 |
| Alexander E. Silverman | Reg. No. 37,940 | Sean P. Lewis | Reg. No. 42,798 |
| Anirma Rakshpal Gupta | Reg. No. 38,275 | Bernice B. Chen | Reg. No. 42,403 |
| Michael J. Schallopp | Reg. No. 44,319 | Noreen A. Krall | Reg. No. 39,734 |
| Kenta Suzue | Reg. No. 45,145 | Marc Foodman | Reg. No. 34,330 |
| Richard J. Lutton, Jr. | Reg. No. 39,756 | Naren Chaganti | Reg. No. 44,602 |
| | | Adam M. Goodman | Reg. No. 43,640 |

Send Correspondence to Kevin J. Canning, Esq. at **Customer Number: 000959** whose address is:


Lahive & Cockfield, LLP, 28 State Street, Boston, MA 02109

Direct Telephone Calls to: (name and telephone number)

Kevin J. Canning, Esq., (617) 227-7400

Wherefore I petition that letters patent be granted to me for the invention or discovery described and claimed in the attached specification and claims, and hereby subscribe my name to said specification and claims and to the foregoing declaration, power of attorney, and this petition.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

| | |
|---|------------------|
| Full name of sole or first inventor Robert P. St. Pierre | |
| Inventor's signature  | Date 10/20/00 |
| Residence 1502 Kingsgate Drive, Sunnyvale, CA 94087 | |
| Citizenship United States | |
| Post Office Address (if different) Same as Above | |
| | |
| Inventor's signature | |
| Date | |
| Residence | |
| Citizenship | |
| Post Office Address (if different) | |
| | |
| Full name of third inventor, if any | |
| Inventor's signature | |
| Date | |
| Residence | |
| Citizenship | |
| Post Office Address (if different) | |
| | |
| Full name of third inventor, if any | |
| Inventor's signature | |
| Date | |
| Residence | |
| Citizenship | |
| Post Office Address (if different) | |